




DK1410 EXPANDED NEOPRENE FOAM RUBBER

MATERIAL SPECIFICATION SHEET

Description	Standard	Value	Unit
ASTM D1056-14 Classification	2C1 B3 M		
Density	ASTM	115-155	Kg/m ³
Compression Deflection (25%)	ASTM 1056	20-40	kPa
Compression Deflection (50%)	ASTM 1056	50-70	kPa
Compression Set (25%/22h/23°C) – After 24hrs	ASTM 1056	2-4	%
Compression Set (50%/22h/23°C) – After 24hrs	ASTM 1056	15-35	%
Shrinkage (22h/70°C)	ASTM	8-12	%
Shore Hardness		40-45	OO
Elongation	ASTM	180-220	%
Temperature Range (Constant)		-40 / +75	°C
Temperature Range (Intermittent)		+90 / +110	°C
Water Absorption (Max Weight Change)	ASTM	1-3	%
Tensile Strength	ASTM	480-530	kPa
Flame Resistance (>3mm)	FMVSS302	Pass	
Environmental Protection		CFC & HCFC	

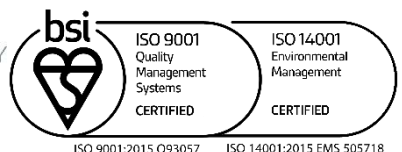

ISO 9001:2015 Q93057 ISO 14001:2015 EMS 505718

The company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company