


PN25

N-Bore		Full Face (mm)					IBC (mm)	
	mm	OD	ID	Holes	Dia.	P.C.D.	OD	ID
	10	90	18	4	14	60	45	18
0.5	15	95	22	4	14	65	50	22
0.8	20	105	28	4	14	75	60	28
1	25	115	35	4	14	85	70	35
1.3	32	140	43	4	18	100	82	43
1.5	40	150	49	4	18	110	92	49
2	50	165	61	4	18	125	107	61
2.5	65	185	77	8	18	145	127	77
3	80	200	90	8	18	160	142	90
4	100	220	115	8	18	180	162	115
5	125	250	141	8	18	210	192	141
6	150	285	169	12	22	240	218	169
8	200	340	220	12	22	295	273	220
10	250	405	274	12	26	355	329	274
12	300	460	325	16	26	410	384	325
14	350	520	356	16	26	470	444	356
16	400	620	407	16	36	550	514	407
18	450	670	458	20	36	600	564	458
20	500	730	508	20	36	660	624	508
24	600	845	610	20	39	770	731	610
28	700	960	712	24	42	875	833	712
32	800	1085	813	24	48	990	942	813
36	900	1185	915	28	48	1090	1042	915
40	1000	1320	1016	28	56	1210	1154	1016
	1100	1420	1120	32	56	1310	1254	1120
48	1200	1530	1220	32	56	1420	1364	1220
56	1400	1755	1420	36	62	1640	1578	1420
60	1500	1865	1520	36	62	1750	1688	1520
	1600	1975	1620	40	62	1860	1798	1620
	1800	2195	1820	44	70	2070	2000	1820
	2000	2425	2020	48	70	2300	2230	2020

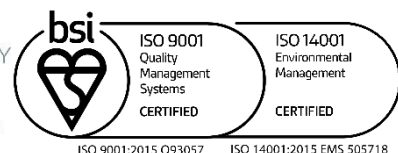

The company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company